


1

### Check package contents

A

Flexor 500 Body




B

Handset



C

Handset Cable




D

Ethernet Cable



E

Power Supply

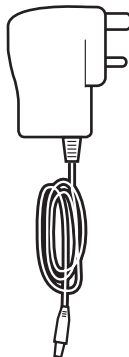


F


VoiceConnect CD



## 2 Connecting handset to Flexor 500

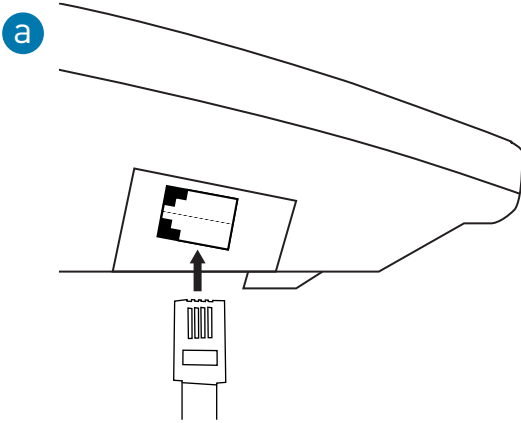


**2a** Connect one end of the handset cable to the socket on the left side of the Flexor 500 base as shown above.

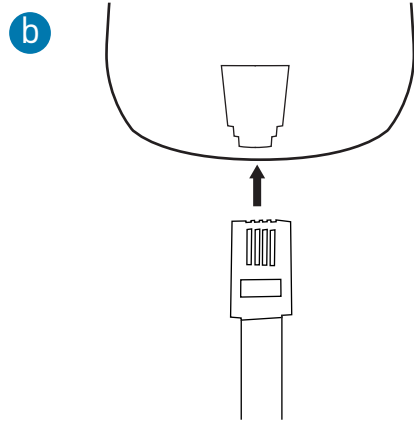

**2b** Connect the other end of the headset cable to the socket in the handset as shown above.

## 3 Connecting Flexor 500

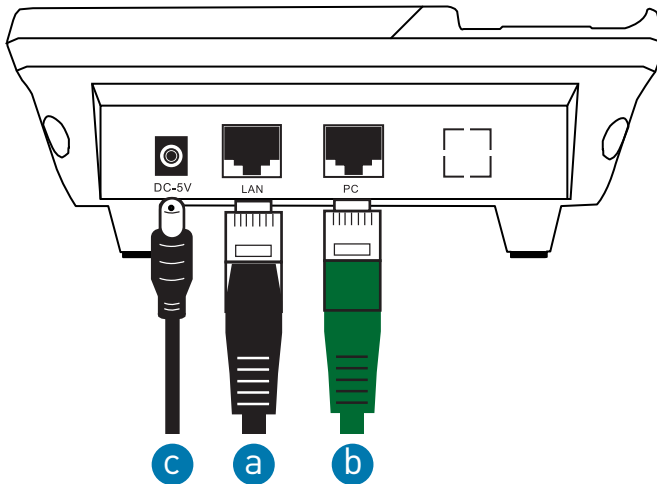

**3a** Using the supplied Ethernet cable connect your local area network (LAN) to the LAN port of the Flexor 500 base.

**3b** Optional. If your PC has an Ethernet connection to your local area network (LAN), unplug the end of the cable connected to your switch, router or hub and connect this to the PC port of the Flexor 500 base.

**3c** Connect the power connector to the Flexor 500 base and plug in the power adaptor to a suitable wall socket and turn the power on at the wall socket. Only use the supplied power adaptor.

## 4

## Getting started

a



Show main menu

Show address book  
Show IP address

b



Show main menu

Show address book


4a When the Flexor 500 starts up it carries out a series of checks for networking and finally that there is a SIP (VoIP) account configured. You can press the **Menu** or **Addr** soft keys to access those menus or press the **IP** button for additional diagnostic information (see 4c below).

4b The Flexor 500 is likely supplied by your vendor pre-configured for a VoIP service. Once the Flexor 500 has completed the startup checks you will see a screen similar to that shown above. The call lights will also light up solid green to show that it is ready to make and receive calls.

c

4c If the Flexor 500 does not have a SIP (VoIP) account configured or you have pressed the soft **IP** button shown in 4a then you will see the screen shown opposite.

In order to configure the Flexor 500, or to further diagnose any problems you are having, access the Flexor 500 web pages using the URL shown.

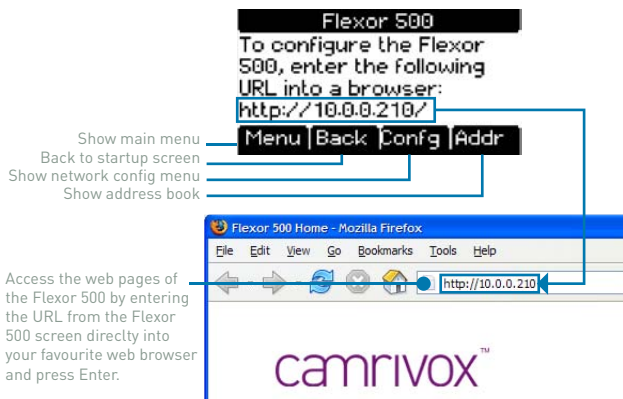

Access the web pages of the Flexor 500 by entering the URL from the Flexor 500 screen directly into your favourite web browser and press Enter.

## 5

Optional installation of VoiceConnect  
(Windows XP/2000 only)

5a Insert the VoiceConnect CD into your CD-ROM drive, this should start the installation automatically. If the the installation does not start automatically:

- Browse to My Computer
- Right click on the CD-ROM containing the VoiceConnect CD
- Select Open from the menu
- Double-click on the file setup.bat in the window that has just opened.

5b Once the installation is complete the VoiceConnect application will start for the first time\*. You may see a Windows Security Alert from Windows Firewall, similar to that in Fig 1. Click Unblock to allow VoiceConnect to access your network.

5c Once the application has started you should see the VoiceConnect Interact icon in your task bar, as shown in Fig 2.

\* If for some reason the application does not start automatically once the installation is complete you can start the application manually by clicking on Start > All programs > VoiceConnect > VoiceConnect.



Fig 1

VoiceConnect Interact icon



Fig 2

# Overview of Flexor 500 keys and LEDs

