

SmartNode™ 4990

T1/E1/PRI VoIP Integrated Access Device



IP-enable legacy PBX systems with one Enterprise-class SmartNode 4990 VoIP Integrated Access Device. Supporting up to 120 concurrent VoIP calls, the SN4990 with built-in G.SHDSL, ADSL, fiber, or X.21 enables broadband providers to connect existing PBX systems with advanced IP telephony services and the PSTN.

15 to 120 VoIP calls

with up to four T1/E1/PRI ports and dual Gigabit Ethernet ports.

WAN Access

4-wire, 11.4-Mbps G.SHDSL.bis; 24-Mbps ADSL; 100-Mbps fiber; or serial 2-Mbps X.21 WAN interface.

VoIP Transcoding Option

Up to 60 channels for WAN bandwidth optimization.

Proven Interoperability

SIP interop with major IP PBX, Softswitch and VoIP Service Providers. Over 100,000 SmartNode deployments worldwide. ISDN/PSTN compliance in nearly every country.

QoS and Security

Deliver secure, toll-quality voice communications with Patton's DownStreamQoS™ with adaptive traffic management and shaping—plus secure voice-over-VPN with AES/DES strong encryption.

Transparent Telephony Features

Complex number manipulation and mapping for seamless integration with existing infrastructures, CLIP, CLIR, hold, transfer and much more.

High Precision Clock

Delivers DECT PBX interoperability with reliable fax performance.

Flexible Mounting Options

The device can be placed on a desktop or installed in a 19-inch rack using the optional rack ear kit (INS-KIT-RACKEARS-11/19).

SmartNode™ Awards

- **2012 Internet Telephony Product of the Year:** SmartNode™ 4670
- **2011 Internet Telephony Product of the Year:** SmartNode™ 5400/2GS
- **2010 Internet Telephony Product of the Year:** SmartNode™ 5400


The SmartNode™ 4990 VoIP Integrated Access Device offers Broadband Providers a single box CPE solution with built-in G.SHDSL, ADSL, fiber, or X.21 broadband access allowing Enterprises to IP-enable their legacy PBX systems. The single box CPE solution allows Broadband Providers to reduce their hardware costs, simplify their network architecture and streamline their service and deployment. Evolving from Patton's award winning SmartNode 4960 Series, the next generation SmartNode 4990 Series comes now with IPv6 upgradeable hardware.

Like every SmartNode™, the SN4990 supports every industry-standard CODEC to deliver toll-quality voice on every call. The Unified Communications Agent™ (UCA) provides any-to-any multi-path switching (simultaneous SIP, H.323, ISDN, and POTS calls with routing and conversion between TDM/PSTN and IP/Ethernet networks—plus T.38 and SuperG3 FAX). VoIP-over-VPN with voice encryption provides secure voice and data via IPsec with AES/DES strong encryption and automated keying via Internet Key Exchange (IKE). In addition, advanced call-router functionality includes least-cost call routing with flexible dialed-number plan support.


The SmartNode survivability suite combines PSTN fallback, SIP Registrar and IP-link redundancy to ensure business continuity in case the IP network fails. Patton's DownStreamQoS™ delivers the advantage of clear, uninterrupted voice-and-data communication. Furthermore, SmartNode's unique high-precision clock delivers first-line IP telephony service in demanding ISDN and DECT environments with reliable FAX and modem performance. In addition, SmartNode delivers a smooth transition to VoIP with strong number portability support accepting incoming calls from the PSTN throughout the VoIP service provider's number porting process. Session border router capabilities include optional transcoding for up to 64 channels. Reduce WAN-access bandwidth requirements by converting high-bandwidth G.711 calls on your LAN into lower-bandwidth G.723 calls for WAN transport.

Providing one to four T1/E1/PRI and two 10/100/1000 Ethernet interfaces with G.SHDSL, ADSL, fiber, or X.21 broadband access in a single box, the SN4990 delivers secure, prioritized unified communications.

Visit www.patton.com/smartnode for more information about the SmartNode 4990.

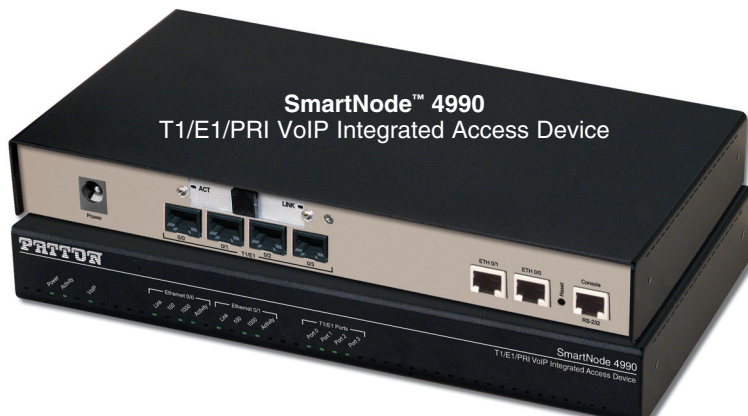

Application Diagram—Migrate Legacy PBX to IP PBX

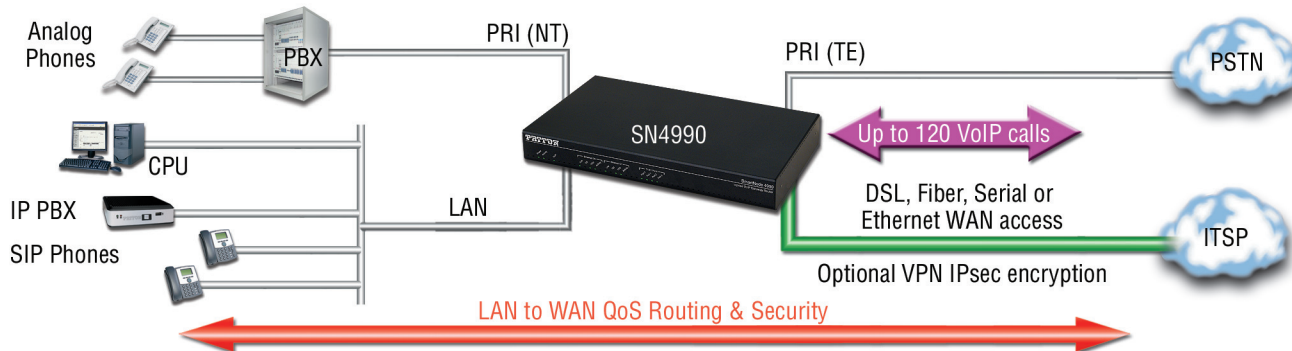

Specifications*

PSTN

Up to four T1/E1/PRI ports (NE/TE) • Signaling support (ISDN DSS-1, NI-2, Q.SIG, CAS Robbed bit loop and ground start, E&M, immediate, wink, double wink) • ISDN AOC/ECT • ISDN speech, audio & data (Fax Gr 4, UDI 64, RD164) • ISDN supplementary services • CAS protocols: RBS (Loop start, ground start, E&M wink, intermediate, double-wink) and R2/MFC-R2 (Q.400–Q.490 and Configurable country profiles), fallback-relay on 4 port versions

VoIP

SIPv2 (SIP Info, Update, PRACK, Privacy, Refer), B2BUA, Optional SIP Registrar and Transcoding, H.323v4 (H.235, Early H.245, H.245 tunneling, fast-connect)

Broadband Access

G.SHDSL: 4-wire G.SHDSL ITU-T G991.2, Annex A, B, F, G • Up to 11.4

Mbps • PPPoE • PPPoA, IPoA, 8PVCs, each UBR, CBR or VBR-rt selectable • I.610 OAM F4/F5 support • G.994.1 (G.hs)

X.21: Serial X.21

ADSL: ADSL2+ ITU-T G.992.5, Annex A, M, B • Up to 24 Mbps • PPPoE • PPPoA • IPoA • 8 PVCs, each UBR, CBR or VBR-rt selectable • I.610 OAM F4/F5 support • G.994.1 (G.hs)

Fiber: SFP slot for fiber WAN uplink • 100Base-T and GigE support • Up to 8 VLANs • PPPoE

Voice Processing

Codec G.711 a-law/mu-law, G.723, G.729ab, G.726, G.727, T.38 fax relay (9.6 k, 14.4 k) • G.711 transparent fax and bypass • 128 ms echo cancellation

Call Routing and Services

Regular expression call routing and manipulation • number blocking • short-

dialing • digit collection, distribution and hunt groups

Data Interfaces

Dual 10/100/1000 TX Ethernet Ports • Autosensing • Auto-MDI • Full-duplex

IP Routing

IP access router • DHCP Client & Server • RIPv2 • BGP • VRRP • Packet fragmentation • Firewall • NAT/NAPT RFC 1631 • Access Control Lists • DMZ port • IPsec VPN (Option)

IP Quality of Service

Voice priority • DownStreamQoS™ • traffic management, shaping policing • IEEE 802.1p, TOS, DiffServ labeling • IEEE 802.1Q, VLAN tag insertion/deletion 4,096

Management

Web/HTTP, CLI with local console & remote Telnet access • HTTP/TFTP configuration & firmware loading • SNMP MIB II and product MIB • SYSLOG •

Secure autoprovisioning for both firmware & unit/subscriber configuration • Built-in diagnostic tools (trace, debug, call generator)

Power & Packaging

Desktop metal chassis

Dimensions: 30.1W x 4.5H x 18.1D cm (11.9W x 1.8H x 7.1D in.)

Weight: < 30 oz (850g)

Internal Power: 100–240 VAC (50/60 Hz)

Power Consumption < 15W

Operating Environment

Operating temperature: 32 to 104° F (0 to 40°C)

Operating humidity: up to 90%, non condensing

Compliance

EMC: EN55022 and EN5502 • Safety: EN 60950 • CE • FCC Part 15 Class A; Part 68; CS-03

* Specifications subject to change without notice.

Ordering Info

SmartNode T1/E1/PRI VoIP IAD: Hi-Capacity, 2x GigEthernet, High-Precision Clock, External UI power, IPv6 ready

SN4991/1E15V[*]/EUI: 1 E1/T1, 15 VoIP channels (upgradeable to 30)

SN4991/1E24V[*]/EUI: 1 E1/T1, 24 VoIP channels (upgradeable to 30)

SN4991/1E30V[*]/EUI: 1 E1/T1, 30 VoIP channels, non-upgradeable

SN4991...with Fallback Relay*

SN4991/4E15VR[*]/EUI: 4 E1/T1, 15 VoIP channels (upgradeable to 60)

SN4991/4E24VR[*]/EUI: 4 E1/T1, 24 VoIP channels (upgradeable to 60)

SN4991/4E30VR[*]/EUI: 4 E1/T1, 30 VoIP channels (upgradeable to 60)

SN4991/4E48VR[*]/EUI: 4 E1/T1, 48 VoIP channels (upgradeable to 60)

SN4991/4E60VR[*]/EUI: 4 E1/T1, 60 VoIP channels, non-upgradeable

SN4991/4E96VR[*]/EUI: 4 E1/T1, 96 VoIP channels (upgradeable to 120)

SN4991/4E120VRI[*]/EUI: 4 E1/T1, 120 VoIP channels, non-upgradeable

SN4991/4E30V120R[*]/EUI: 4 T1/E1/PRI, fallback-relays, 30 VoIP channels (upgradeable to 120)

Note: For complete ordering list, contact sales@patton.com

Options & Accessories

SNSW-49V1: 1 channel Voice Upgrade Key for SN4990 VoIP IADs. Software expansion for additional voice channels.

SNSW-VPN2: Software option for IPsec VPN, including DES/3DES and AES encryption, IKE and Voice-Over-VPN

SNSW-QSIG2: Support for ISDN Q.SIG.

INS-KIT-RACKEARS-11/19: 19-inch Rack Ear Kit

* Fallback relay between ports E1/T1 0/0 and 0/1 of all 4-port models

[*] For **X.21** option, add **D** in SKU (ex: SN4991/40E30VRD/EUI)

For **G.SHDSL** option, add **2GS** in SKU (ex: SN4990/4E30V2GS/EUI)

For **Fiber** option, add **F** in SKU (ex: SN4991/1E15VF/EUI)

For **ADSL** option, add **A** in SKU (ex: SN4991/1E30VA/EUI)

Note: ADSL option is only available for 15 and 30-channel models.

PATTON
Let's Connect!™

Patton Electronics Co.
7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone +1 301 975 1000
Fax +1 301 869 9293
E-mail sales@patton.com
Web www.patton.com

Patton-Inalp Networks AG
Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone +41 (31) 985 25 25
Fax +41 (31) 985 25 26
E-mail sales@inalp.com
Web www.inalp.com

Patton Hungary Zrt
Gábor Dénes utca 4.
Infopark Building C
Budapest H-1117
Hungary
Phone +36 1 439 4840
Fax +36 1 439 4844
E-mail ce@patton.com
Web www.patton.com

07MSN4990-DS2

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics. www.voipon.co.uk and other countries.

www.voipon.co.uk sales@voipon.co.uk Tel: +44 (0)1245 808195 Fax: +44 (0)1245 808299