



octoBRI 2.0 PCI ISDN Configuration Overview

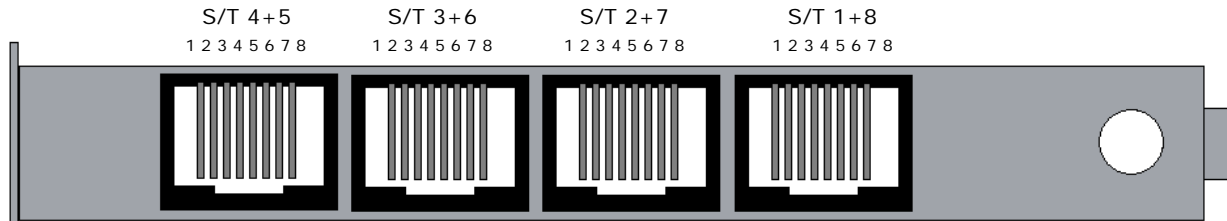

Front view of the card (bracket with RJ45 jackets)

Pin assignments	
S/T a+b	Pins 3,4,5,6 S/T port a (regular S0 pinout)
	Pins 1,2,7,8 S/T port b (1 > 3, 2 > 4, 7 > 5, 8 > 6 for S0 pinout)

TE/NT Settings	
	Set all jumpers to the left to select NT mode for this port.
	Set all jumpers to the right to select TE mode for this port.

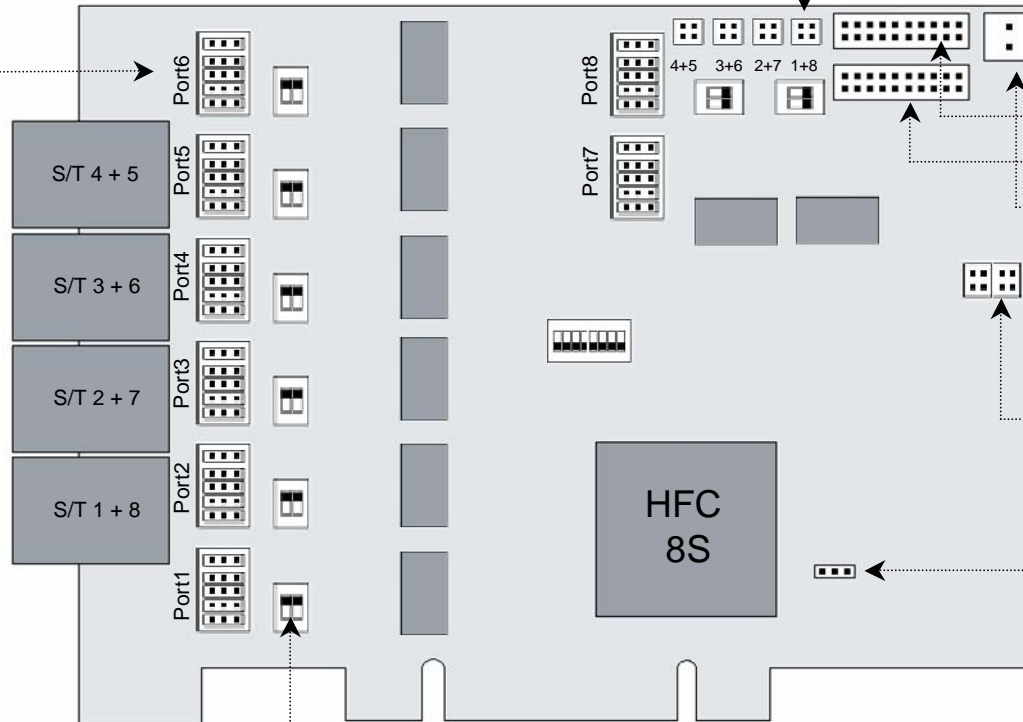

Power Feeding (only for NT Mode)	
	Power feeding enabled for the the corresponding port if jumpers set (PFM required)
	Not powered if no jumpers set.

PCM Out

PCM In

Power Connector
Connector for external power feeding module to feed S/T Interfaces of up to 4 quadBRI cards. (Available optionally)

onboard PFM connector

Power Supply Configuration	
	3.3 V PCI environment
	5 V PCI environment

Termination of S/T Interface (100 Ω)	
	Both Switches in ON Position : Termination = ON
	Both Switches in OFF Position : Termination = OFF



Warning
This equipment will be inoperable when main power fails